

Wood burning fires and stoves

2026/2027

Dik Geurts

Creation of flames


Dik Geurts

Lovers of the real wood fire

The name Dik Geurts has been synonymous with craftsmanship and design ever since the company was founded, and over the past 40 years it has become a household name in the fireplace world. Since 2007 Dik Geurts has been fully integrated in DRU Verwarming B.V., an innovative company that has guaranteed top quality for centuries.

In addition to being designers, we at Dik Geurts are particularly fond of the real wood fire. In our factory in Duiven, The Netherlands, we work hard every day on the quality and ease of operation of our stoves and fires. With this brochure, we would like to show you how the combination of simplicity, experience and knowledge leads to beautiful fires and the most beautiful flames.

Dik Geurts is a trademark of DRU Verwarming B.V.

Scan the QR code and watch the DRU corporate video



ENVIRONMENT 4
Wood firing and the environment

GREENBLOCKS 8
The new standard in wood stoves

WOOD STOVE TECHNOLOGY 10
Ingenious technology, simple to use

DESIGN FIRES 12
3-sided and Front

WOOD AND MULTI-FUEL STOVES 24
3-sided and Front

INSERT AND BUILT-IN FIRES 46
Front (including fires with fan), Tunnel, 2-sided and 3-sided

CONNECTION OPTIONS 64
Insert- and built-in fires

CENTRAL HEATING FIRES 66
Front

TECHNICAL DATA 68
Line drawings and technical specifications

Icons used

kW | Output P. **6**

EA | External Air P. **7**

IR | Infrared P. **10**

GREENBLOCKS

DG Filter P. **9**

DG Therm P. **9**

DG Cat P. **9**

DG Smart Assist P. **9, 11**

DG Room Sealed P. **7, 9**

Dik Geurts
Creation of flames

Scan the QR code and experience the passion of Dik Geurts wood fires.


Save on wood,
reduce fine dust
and help the
environment

All wood burning stoves and fires in the Dik Geurts range have a particularly high efficiency. A higher temperature is reached in these closed and clever woodburners, and as a result combustion is much more complete and efficient. Even residual soot particles are fully burned, so you save on wood, emit less particulate matter and soot particles, and thus protect the environment.



Ready for the future with EcoDesign

Since 1 January 2022, European legislation sets requirements for the minimum required efficiency of a stove and the maximum allowed emission of particulate matter. All Dik Geurts fireplaces and stoves comply with this legislation and carry the EcoDesign label. Several Dik Geurts fires and stoves are also Defra approved. For the right purchase, choose an environmentally friendly Dik Geurts wood stove for now and in the future.

Climate neutral

In principle, heating with wood is CO_2 neutral. During the growth phase of a tree, CO_2 is absorbed from the air. When the tree is cut down and burned, the same amount of CO_2 is released into the atmosphere. In order to be able to remain climate neutral, sustainably sourced wood must be used. Therefore a new tree is planted for every tree that is cut down. This process ensures everything remains nicely in balance.

Energy label

The Dik Geurts wood burning stoves are provided with an energy efficiency label. The greener the label, the better it is for the environment. Our stoves are all in the A-class or better.





The right way to burn

The best setup

With the so-called **'Swiss method'** you can burn wood safely and cleanly. At the bottom of the stove you should place large logs, on top of which you should put small pieces of wood, and on top of those, firelighters. Replenish the heating space when all that is left is a glow bed. Place a number of logs with the cleft side down in the fire box and open the air supply.

The right wood

The fuel must be sufficiently dry and suitable as firewood. Good firewood has a moisture percentage of 15%-20%. You should never burn waste wood such as chipboard or old railway sleepers, or treated wood. The combustion of waste or treated wood can produce toxic fumes. As well as being unsafe, this is also very harmful to the environment.

Scan the QR code for an explanation video about burning wood.

A Dik Geurts wood stove always has a high efficiency, low emissions of CO and fine dust and ultimate fire control. Guaranteed.

The right output

The output of a wood burning fire or stove must match the space you want to heat. If you have a fire with too much output, the room will soon become too hot. You will then not be able to let the fire burn to its full capacity and this can cause odour nuisance or extra pollution of the chimney. If the power is too low, you run the risk that the fire will not heat the room enough.
Dik Geurts offers a wide range of stoves and fires for larger and smaller rooms. Because these fires can also be fired at low power (4 kW), they are extremely suitable for use in spring or autumn.

kW (Output, indicated in kilo Watt)

Fireplaces with outdoor air connection

Houses today are increasingly well insulated. To ensure that enough fresh air still enters the home, ventilation systems are often installed. It is therefore important to consider the supply air for combustion when choosing your fireplace. For instance, you can get the supply air from the setup room, but also from outside. To get the supply air for wood combustion from outside, it is important to equip a wood fire with an outside air connection. We distinguish between:

EA fireplaces ('External Air'), standard

- used in neutral or overpressure situations
- with the EA kit, oxygen for combustion can come almost entirely from outside
- possible for all fireplaces

RS fireplaces ('DG Room Sealed'), option

- used in low pressure situations in the living space
- oxygen for combustion comes entirely from outside
- optional with a large number of fireplaces

Modern homes choose RS

RS wood-burning fireplaces are often installed in modern, passive and gap-tight homes. Before delivery, these fireplaces are tested for leak-tightness and provided with a certificate. Optimally suited for a balanced indoor climate and optimum heating pleasure.

GREENBLOCKS


DG Room Sealed is a GreenBlocks option (see page 9).

Calculate output

Calculate the content of the space you want to heat (length x width x height). Next, it is important to get an idea of the extent to which your house is insulated.

A Home is fully insulated
B Partially insulated, no double glazing throughout
C Virtually uninsulated and no double glazing

The graph shows the output (in kilowatts) required to heat your home.

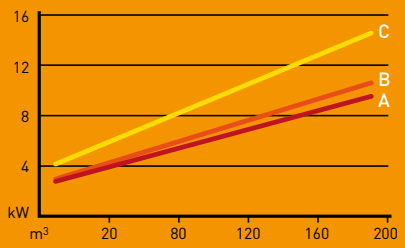



Warm heart for Uganda

At Dik Geurts we care for the world around us, and human beings also deserve our attention. In our project 'A fireplace for you, a future for her', part of the proceeds from our fires is used to provide women in Uganda with a microcredit for a tree plantation.





GREENBLOCKS

How GREEN do you want to burn?



The NEW standard in wood stoves

With GreenBlocks from Dik Geurts, you burn exactly how you want – but greener than ever before.


Thanks to this smart system, you can easily expand your wood stove with environmentally friendly options. This way, you decide how green and environmentally conscious your burning is. GreenBlocks is designed for those looking for a sustainable and customizable heating solution.

Stylish and ready for the future!

Your GreenBlocks wood stove in 3 steps:

1. Choose your favourite wood stove and desired options
2. Visit a dealer for expert advice
3. Place your order and enjoy eco-friendly and sustainable heating

ECO DESIGN

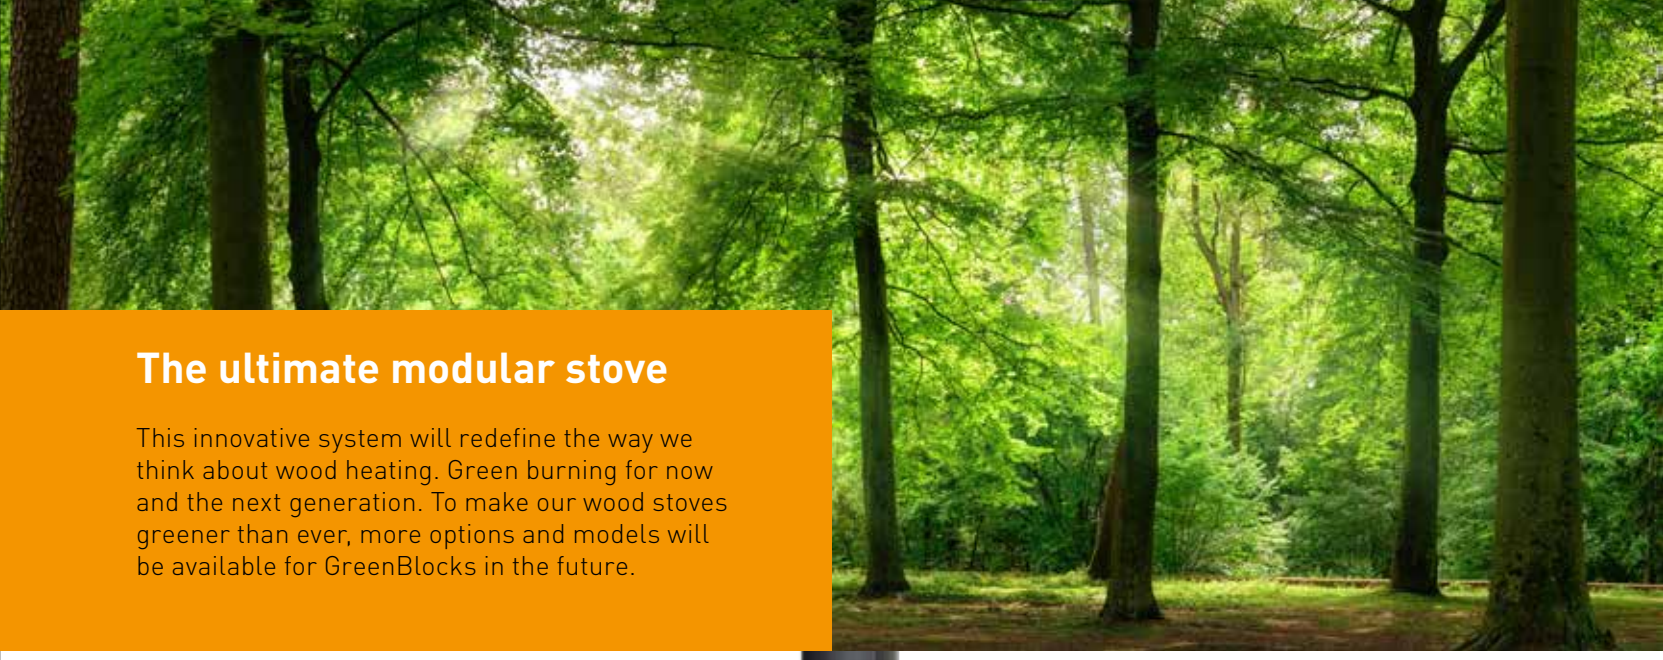

The ultimate modular stove

This innovative system will redefine the way we think about wood heating. Green burning for now and the next generation. To make our wood stoves greener than ever, more options and models will be available for GreenBlocks in the future.

DG Cat:
The catalytic converter converts unburned gases and particles in the smoke into less harmful substances. This reduces CO emissions by up to 50%. DG Cat is always combined with DG Smart Assist for ultimate efficiency!

DG Smart Assist:
DG Smart Assist automatically regulates the airflow for optimal combustion. When it's time to add wood, the stove signals you and you receive a notification via the free app (optional). This saves wood and reduces emissions and odor. More info, see page 11.

DG Room Sealed (RS):
The stove is made extra airtight — ideal for airtight or passive houses. DG Room Sealed ensures that oxygen for combustion comes entirely from outside and no CO enters the living room.



DG Filter:
The fine dust filter captures fine particles using an electrostatic electrode. This significantly reduces the amount of fine dust released through the chimney. Emissions are reduced by up to 75% with this filter.

OR

DG Therm:
Those who choose this option enjoy prolonged warmth without extra fuel.
The heat-accumulating stones in the wood stove store heat while burning and gradually release it afterward. This way, you benefit from hours of pleasant, radiant warmth.

More info:
www.drufire.com/greenblocks
or scan the QR code

Thoughtful technique, simple to use

A Dik Geurts wood stove is not just a cabinet in which you can burn wood. It is a thoughtfully-designed device that ensures efficient and clean combustion at a high efficiency. Our fires and stoves have a closed combustion chamber (so no grate) that provides good insulation, and the flue gases that are released during combustion are led outside via an ingenious labyrinth.

Infrared glass

At Dik Geurts we use infrared glass for a number of our fires and stoves to circulate the heat in the fire box. This gives a higher efficiency, retains the heat in the fire and as a result the glass stays clean much longer.

IR (Infrared)

Vermiculite

The combustion chambers of all Dik Geurts fires are insulated with heat-retaining natural vermiculite. For a nice contrast with the yellow flames, the vermiculite in the combustion chamber of our Design fires is coloured dark anthracite.

Floor plates

For a complete set-up and extra protection of the floor, we offer round, rectangular and square floor plates. Finished in dark anthracite steel and available in different sizes.



Optional floor plate

Simple operation

DG Smart Assist

Always enjoy perfect combustion with DG Smart Assist. This smart system lets you easily control your wood fire, with automatic air control and wood refill notifications. DG Smart Assist makes burning wood easy, efficient and environmentally friendly.

Characteristics
- Automatic air slide
- Temperature sensor controls the air supply
- Always an optimal restart
- Always refill at the right time (saving on wood)

Control DG Smart Assist

Automatic (default)
- Refilling: sound signal via the wood stove

Via smartphone/tablet (optional, via free app)
- Select flame height and heat output
- Refilling: notification via smartphone or tablet

GREENBLOCKS

DG Smart Assist is a GreenBlocks option (see page 9).



Watch the DG Smart Assist video



Simple operation: just one lever

Manual control

Dik Geurts fires and stoves are easy to operate. They have a single lever to regulate the surprisingly sophisticated air supply. Thanks to this, Dik Geurts fires and stoves ignite very easily.



Design fires

The eye-catcher for every interior



A design fire gives your home character and can be the beating heart of any interior. The Dik Geurts design fires can seem to float in space and at the same time form a natural unity with the rest of the room.

Page 14

ODIN FRONT

Base
Fixed
Plateau
Wall

Page 16

ODIN TUNNEL

Base
Fixed
Plateau

Page 18



OVAL FRONT

Base
Fixed
Legs
Plateau
Wall

Page 20



OVAL TUNNEL

Base
Fixed
Legs
Plateau

Page 22



BORA CORNER

Cubes
Fixed
Floating Plateau
Straight Plateau
Wall

Odin

Function and design go hand in hand perfectly

The unique, round design not only makes the Odin a real eye-catcher, but its shape also makes for a great flame picture.

- Faster warmth while environmentally friendly
- Unique round glass window
- Self-closing door (optional)
- Hanging from the ceiling or on the wall or standing on a plateau or robust base



Base with external air connection



Odin Front, Fixed

Efficiency 75,2% A
W x D x H 606 x 380 x 606 mm

4-8 kW EA



Odin Front, Wall

Efficiency 75,2% A
W x D x H 606 x 415 x 606 mm

4-8 kW EA



Odin Front, Base

Efficiency 75,2% A
W x D x H 606 x 600 x 940 mm

4-8 kW EA



Scan the QR code for a preview



Odin Front, Plateau

Efficiency	75,2% A
W x D x H	1600 x 380 x 842 mm

4-8 kW EA

Scan the QR code for a preview



Odin Tunnel, Fixed

Efficiency	75,0% A
W x D x H	606 x 400 x 606 mm

6-10 kW **EA**

Scan the QR code for a preview



Ultimate fire experience with two-way visibility and warmth



Odin Tunnel, Base

Efficiency 75,0% A

W x D x H 606 x 600 x 940 mm

6-10 kW EA



Odin Tunnel, Plateau

Efficiency 75,0% A

W x D x H 1600 x 400 x 842 mm

6-10 kW EA



Oval

The new style of heating

Typical Dik Geurts is this design fireplace with its oval shape. The various placement options make the Oval suitable for any interior.

- Beautiful fire view due to oval shape
- Unique air slide for easy control of flame intensity
- Self-closing door (optional)
- Wall-mounted, free hanging from the ceiling or standing on a plateau, robust base or legs



Base with external air connection



Oval Front, Base

Efficiency 75,9% A
W x D x H 980x380x944 mm

6-10 kW | EA | DG Room Sealed



Oval Front, Fixed

Efficiency 75,9% A
W x D x H 980x380x606 mm

6-10 kW | EA | DG Room Sealed



Oval Front, Plateau

Efficiency 75,9% A
W x D x H 2000x380x838 mm

6-10 kW | EA | DG Room Sealed



Oval Front, Wall

Efficiency 75,9% A
W x D x H 980x380x606 mm

6-10 kW | EA | DG Room Sealed





Scan the QR code for a preview

Oval Front, Legs

Efficiency	75,9% A
W x D x H	980x474x926 mm

6-10 kW

EA

DG Room Sealed



Oval Tunnel, Fixed

Efficiency	81,5% A+
W x D x H	980x380x606 mm

9-12 kW | IR | EA | DG Room Sealed

Scan the QR code for a preview



Unique design and a beautiful fire from two sides

Oval Tunnel, Base

Efficiency 81,5% A+
W x D x H 980x380x944 mm

9-12 kW | IR | EA | DG Room Sealed



Oval Tunnel, Plateau

Efficiency 81,5% A+
W x D x H 2000x380x838 mm

9-12 kW | IR | EA | DG Room Sealed



Oval Tunnel, Legs

Efficiency 81,5% A+
W x D x H 980x474x926 mm

9-12 kW | IR | EA | DG Room Sealed



Bora Corner



Glass-to-glass without corner profile

Robust cube with double-sided fire view

The two-sided glass window of the Bora Corner design fires gives a beautiful fire view. Hanging in the room or standing on a plateau, the Bora provides warmth and atmosphere throughout the area.

- Choose a left or right version
- Design fireplace for any position in the house
- Wide output range, optimally adjustable

Bora Corner, Fixed

Efficiency 78,1% A
W x D x H 505 x 410 x 510 mm

4-9 kW IR EA DG Room Sealed



Scan the QR code for a preview

Bora Corner, Floating Plateau

Efficiency 78,1% A
W x D x H 1200 x 450 x 829 mm

4-9 kW IR EA DG Room Sealed



Scan the QR code for a preview

Bora Corner, Straight Plateau

Efficiency 78,1% A
W x D x H 1500 x 450 x 879 mm

4-9 kW IR EA DG Room Sealed



Scan the QR code for a preview

Scan the QR code for a preview

Bora Corner, Cubes

Efficiency	78,1%
W x D x H	625 x 577 x 1030 mm

A

4-9 kW | IR | EA | DG Room Sealed

Bora Corner, Wall

Efficiency	78,1%
W x D x H	505 x 448 x 510 mm


A

4-9 kW | IR | EA | DG Room Sealed



Scan the QR code for a preview

Pinnacle of atmosphere and warmth

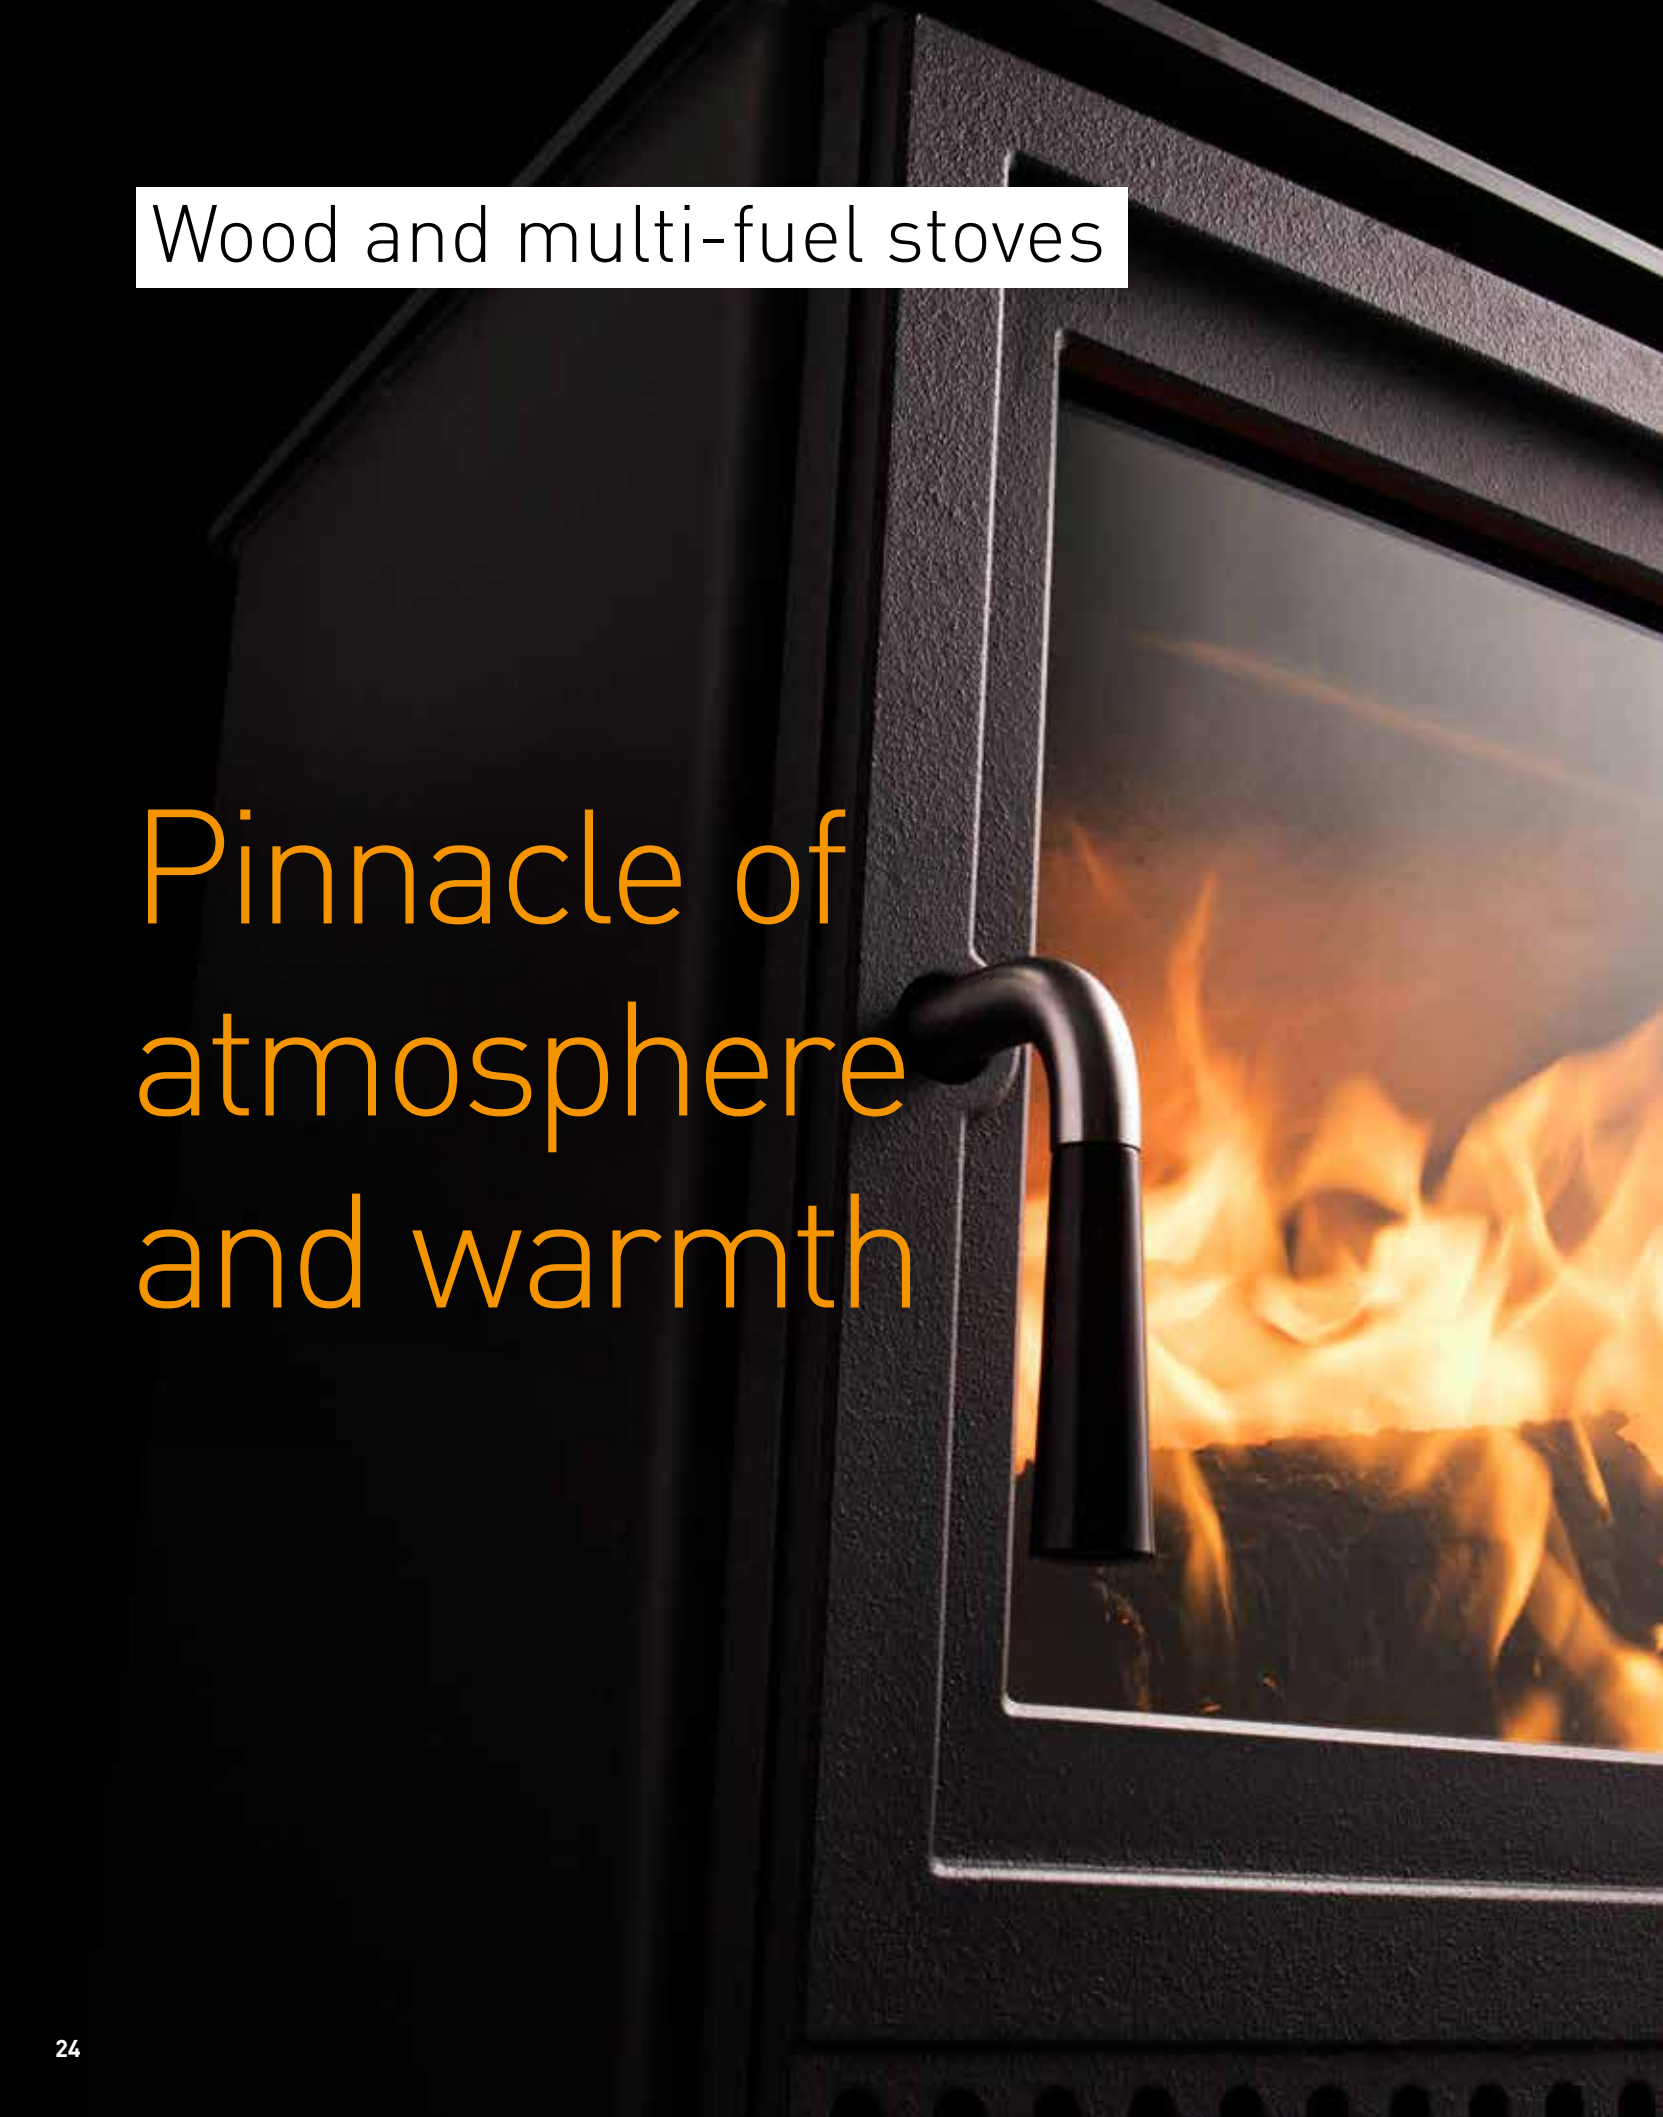

A long gaze into dancing flames, the cosy sound of a real crackling fire and the warmth from a natural source. With a Dik Geurts wood fire you bring the old-fashioned cosiness of a campfire to your living room.

Page 26



VIDAR TRIPLE

Small-Medium-Large
Store
Floating Plateau
Straight Plateau
Wall

Page 30



FOLKE

Page 31



KALLE NEXT

Page 32



MODIVAR 5

Store Front
Store Corner
Floating Plateau
Straight Plateau

Page 34



ORBE
ORBE, HIGH

Page 36



SOREN 5

Page 36



ASTE 5

Page 37



LARS 1000

Page 38



IVAR

5, Low
5, High
5, Store
8, Low
8, Store

Page 44



JANNIK

Medium, Low
Medium, High
Large

Vidar Triple

A stove to suit any home



Vidar stoves come in several shapes and sizes.
There is always a suitable stove to suit your home.

- Freestanding with log compartment, standing on a plateau or wall-mounted
- Fits any room with a choice of 3 sizes
- Automatic control via smartphone or tablet
- Fitted with IR (infrared) side windows for extra-clean glass
- Optional raised ash threshold

GREENBLOCKS

Vidar Triple Medium, Floating Plateau

Efficiency 76,3% A
W x D x H 1200x450x835 mm

4-9 kW | IR | EA | DG Room Sealed | DG Smart Assist



Vidar Triple Medium, Straight Plateau

Efficiency 76,3% A
W x D x H 1500x450x885 mm

4-9 kW | IR | EA | DG Room Sealed | DG Smart Assist



Vidar Triple Medium, Wall

Efficiency 76,3% A
W x D x H 662 x 430 x 535 mm

4-9 kW | IR | EA | DG Room Sealed | DG Smart Assist



Scan the QR code for a preview



Vidar Triple Medium, Store

Efficiency 76,3% A

W x D x H 662 x 410 x 850 mm

4-9 kW | IR | EA | DG Room Sealed | DG Smart Assist

Scan the QR code for a preview

Vidar Triple Large, Wall

Efficiency 79,0% A
W x D x H 800 x 430 x 535 mm

6-10 kW | IR | EA | DG Room Sealed | DG Smart Assist

Scan the QR code for a preview

Vidar Triple Large, Store

Efficiency 79,0% A
W x D x H 800 x 410 x 850 mm

6-10 kW | IR | EA | DG Room Sealed | DG Smart Assist



Vidar Triple Large, Straight Plateau

Efficiency 79,0% A
W x D x H 1500x450x885 mm

6-10 kW | IR | EA | DG Room Sealed | DG Smart Assist



Scan the QR code for a preview

More space, modern style, efficient heat

GREENBLOCKS

Vidar Triple Small, Wall

Efficiency 79,0% A
W x D x H 500 x 380 x 535 mm

4-7 kW | IR | EA | DG Room Sealed | DG Smart Assist

Scan the QR code for a preview

Vidar Triple Small, Store

Efficiency 79,0% A
W x D x H 500 x 360 x 850 mm

4-7 kW | IR | EA | DG Room Sealed | DG Smart Assist



Vidar Triple Small, Floating Plateau

Efficiency 79,0% A
W x D x H 1200x450x835 mm

4-7 kW | IR | EA | DG Room Sealed | DG Smart Assist



Vidar Triple Small, Straight Plateau

Efficiency 79,0% A
W x D x H 1500x450x885 mm


4-7 kW | IR | EA | DG Room Sealed | DG Smart Assist



Scan the QR code for a preview



Scan the QR code for a preview

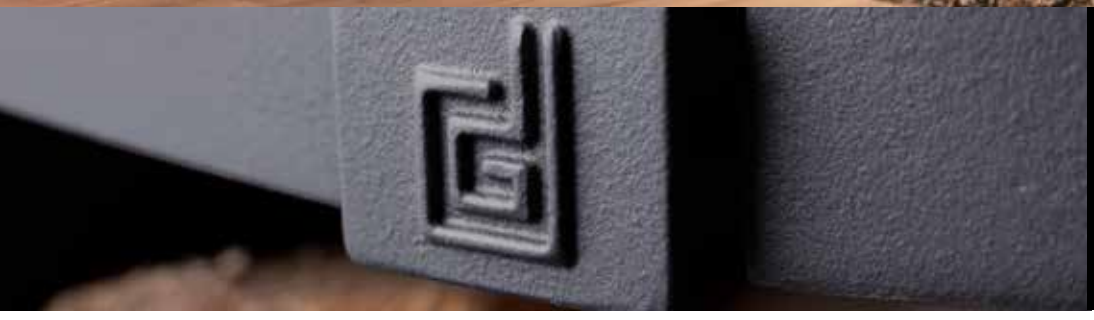

Folke

Efficiency	77,3%
W x D x H	476 x 410 x 1000 mm

A

4-8 kW | IR | EA | DG Room Sealed | DG Smart Assist

Folke

Atmospheric, with or without fire

Thanks to the Folke's three-sided fire view, you can enjoy the lively flames even more. The wood compartment underneath the fire box gives this stove a rustic and atmospheric look, even when the stove is not burning.

- Unique air slide
- Automatic control via smartphone or tablet
- Heat reflective (infrared) side windows
- Optional kit for self-closing door
- Suitable for mechanically ventilated and passive houses

GREENBLOCKS

Kalle Next

Extra-large windows for an optimal view of the fire

The Kalle Next is a stylish wood burning stove with an industrial look and a practical wood storage compartment beneath the combustion chamber. The three large windows provide a stunning view of the flames.

- Enjoy a beautiful wood fire in an environmentally friendly way
- Optional kit for self-closing door
- Choose DG Smart Assist for automatic air control and perfect combustion
- Optional filter reduces fine dust emissions by up to 75%

GREENBLOCKS

Kalle Next

Efficiency	77,3%
W x D x H	510 x 381 x 1000 mm

A

4-8 kW | IR | EA | DG Filter | DG Room Sealed | DG Smart Assist



Scan the QR code for a preview

Modivar 5

Tight shapes and ultimate fire control

Thanks to their sleek shapes and dark steel, Modivar stoves are ideal for a modern interior. If you are looking for something really special then a floating plateau is worth it.

- Ultimate fire control thanks to simple air slide
- Integrated door handle
- Choice of wood compartments and plateaus



Modivar 5, Floating Plateau

Efficiency 82,0% A+
W x D x H 1200 x 450 x 857 mm

4-7 kW | EA | DG Room Sealed



Modivar 5, Straight Plateau

Efficiency 82,0% A+
W x D x H 1500 x 450 x 907 mm

4-7 kW | EA | DG Room Sealed



Modivar 5, Store Front

Efficiency 82,0% A+
W x D x H 450 x 368 x 1000 mm

4-7 kW | EA | DG Room Sealed



Modivar 5, Store Corner

Efficiency	82,0% A+
W x D x H	450 x 368 x 1000 mm

4-7 kW | EA | DG Room Sealed

Scan the QR code for a preview





Scan the QR code for a preview

Orbe

Efficiency	81,6% A+
W x D x H	480x480x1052 mm

5-9 kW | EA | DG Cat | DG Smart Assist | DG Room Sealed

Orbe

The perfect mix of warmth and design

The Orbe is a modern, freestanding wood stove that fits perfectly into both classic and contemporary interiors. The combination of an integrated door handle and premium finish creates a luxurious look.

- Robust cast-iron door
- Automatic control via smartphone or tablet
- Matching steel floor plate
- Optional kit for self-closing door
- Suitable for mechanically ventilated and passive houses

GREENBLOCKS

Orbe, High

The ultimate modular stove

The Orbe, High combines sleek design with an impressive, classic flame displays. A stylish source of warmth that brings every living room to life. This modern, efficient stove makes the most of your firewood, especially when paired with GreenBlocks, the smart modular stove system.

- The curved glass window offers a beautiful view of the fire
- Excellent output for an average-sized living room
- Optional kit for self-closing door
- Fully compatible with all GreenBlocks options
- Low fine dust emissions thanks to high-quality combustion

Orbe, High

Efficiency	81,6% A+
W x D x H	480 x 480 x 1434 mm

5-9 kW | EA | DG Filter | DG Therm | DG Cat | DG Smart Assist | DG Room Sealed

GREENBLOCKS



Scan the QR code for a preview

Aste 5 & Soren 5

Woodburning stove with rural countryside look

The Aste 5 and Soren 5 have a sturdy appearance with crisp lines and plenty of fire visibility. It is easy to install in an existing situation. The cast-iron door and the classic legs give the stove a robust appearance.

- Ideal for placing in an existing fireplace
- Chimney connection only 10 cm from the back
- Stylish door handle



Aste 5

Efficiency	82,0%	A+
W x D x H	486 x 350 x 555 mm	

4-7 kW · EA · DG Room Sealed

Scan the QR code for a preview

Soren 5

Efficiency	82,0%	A+
W x D x H	450 x 350 x 570 mm	

4-7 kW · EA · DG Room Sealed

Scan the QR code for a preview



Lars 1000

Atmosphere, heat and slow-cooking

Above the glass window of the Lars 1000 wood burning stove there is a room that can be used as an oven. This stove offers atmosphere, warmth and also the possibility to prepare simple dishes.

- Unique oven at the top of the stove
- High efficiency
- Low particulate emissions thanks to high-quality combustion

Lars 1000

Efficiency	82,0% A+
W x D x H	448 x 348 x 1000 mm

4-7 kW | EA | DG Room Sealed



Ivar 5

Versatile source of atmosphere for the real enthusiast

The Ivar series is recognisable by the sleek cast iron door that offers a full view of the flames. Ivar stoves combine a compact and stylish appearance with the technically advanced combustion process for which Dik Geurts is known.

- Removable 'cold' handle
- Suitable for installation in existing spaces
- Wide output range & extremely low emissions







Ivar 5, Low


Efficiency	82,0% A+
W x D x H	450 x 350 x 555 mm

4-7 kW | EA | DG Room Sealed

Ivar 5, High

Efficiency	82,0% A+
W x D x H	450 x 350 x 660 mm

4-7 kW | EA | DG Room Sealed

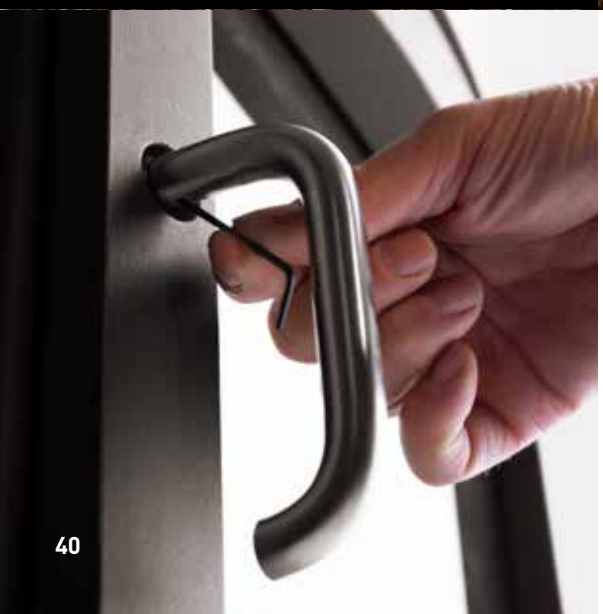

Cast iron door with removable handle



Ivar 5, Store

Efficiency	82,0%
W x D x H	450 x 350 x 850 mm

A+

4-7 kW

EA

DG Room Sealed

Ivar 8



Ivar 8, Low

Efficiency	76,6% A
W x D x H	540 x 350 x 555 mm

5-10 kW | EA | DG Room Sealed

Scan the QR code for a preview



Scan the QR code for a preview

Ivar 8, Store


Efficiency	76,6% A
W x D x H	540 x 350 x 850 mm

5-10 kW

EA

DG Room Sealed

Large glass window with wide view of the fire

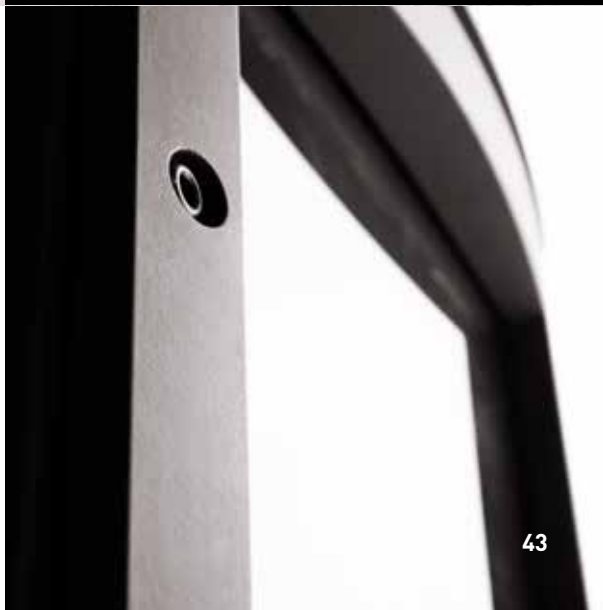

Jannik

Strikingly beautiful details, typically Dik Geurts

With the stoves in the Jannik series you recognise the robust details that are typical for the designs of Dik Geurts. Clean lines, sturdy hinges and a unique, slim handle. This handle provides easy access to the inside of the stove.

- Unique handle
- Wide power range
- Typical Dik Geurts wood-burning stove



Jannik Medium, High

Efficiency	82,0%	A+
W x D x H	550 x 375 x 900 mm	

4-7 kW EA

Jannik Medium, Low

Efficiency	82,0%	A+
W x D x H	550 x 375 x 680 mm	

4-7 kW EA





Jannik Large

Efficiency	81,5%	A+
W x D x H	620 x 380 x 780 mm	

4-8 kW EA



Inserts and built-in fires

The solution for renovation and new construction

Inserts are designed for installation in an existing situation. When converting or renovating, an old fire can be replaced easily by a modern and environmentally friendly fire with a higher output. Built-in fires are placed predominantly in new situations.

Page 50



FRONT INSTYLE

500
550
600
650
700
800
1000

Page 52



FRONT PROSTYLE

500
550
600
650
700
800
1000

Page 54



FRONT, VENTILATOR INSTYLE

600V Next
700V Next
800V Next

Page 56



TUNNEL INSTYLE

Tunnel 700

Page 56



TUNNEL PROSTYLE

Tunnel 700

Page 58



2-SIDED SLIM INSTYLE

Corner Slim 660/495
Corner Slim 660/570

Page 60



2-SIDED INSTYLE

Corner 660 Low
Corner 660 High

Page 61



3-SIDED INSTYLE

Triple 660 Low

Page 62



3-SIDED INSTYLE

Triple U 700

Instyle & Prostyle



Inserts and built-in fires for every interior

Dik Geurts has a wide range of inserts and built-in fires. Tunnel fires, 3-sided fires, fires with an extra large glass window and different kinds of frames; we have a suitable fire for every interior.

The Instyle fires have a completely clear glass window. The Prostyle range with screen-printed glass are made for an even more beautiful view of the fire.

Door and glass options



Instyle fireplaces
Clear glass window



Prostyle fireplaces
Black screen-printed glass

Frames

A frame creates a neat and finished look for the built-in/insert fireplace. It hides any spaces between the fireplace and the surrounding wall, creating a seamless and professional look. At Dik Geurts, there is a very wide choice of frames in different styles.

Standard frames for front and tunnel fires

Classic Line 4S
solid, 40 mm all around



Classic Line 3S
solid, 40 mm top, left and right, base section of frame 20 mm



Modern Line
sloped sides, 40 mm all around



Slim Line
sloped sides, 20 mm all around



Build in 3 mm
frameless



Build in 8 mm
frameless



Frame type		Instyle/Prostyle						
		500	550	600	650	700-Tunnel[1]	800	1000
Classic Line 4S	WxH	580 x 537	587 x 617	660 x 537	710 x 552	760 x 657	860 x 637	1060 x 637
Classic Line 3S	WxH	580 x 517	**n/a**	660 x 517	710 x 532	**n/a**	**n/a**	**n/a**
Modern Line	WxH	580 x 537	587 x 617	660 x 537	710 x 552	760 x 657	860 x 637	1060 x 637
Slim Line	WxH	540 x 497	547 x 577	620 x 497	670 x 512	720 x 617	820 x 597	1020 x 597
Build in 3 mm	WxH	506 x 463	513x543	586x463	636x478	686x583	786x563	986x563
Build in 8 mm	WxH	**n/a**	**n/a**	600x477	650x492	700x597	**n/a**	**n/a**

[1] Frames on the Tunnel can be combined.

Standard frames for front fires with ventilating fan

Classic Line 4S
solid, 40 mm all around



Build in 3 mm
frameless



Frame type		Instyle		
		600V Next	700V Next	800V Next
Classic Line 4S	WxH	640 x 547	740 x 667	840 x 647
Build in 3 mm	WxH	566 x 473	666 x 593	766 x 573

Custom-made frames

The Dik Geurts product options are extensive. Nevertheless, it is possible that something does not fit during a conversion or renovation. In that case, a solid Classic Line 4S front frame can be custom-made to fit an existing fireplace opening. The width can vary between 20 and 100 mm.

Available for fireplaces:

- Instyle/Prostyle 500, 550, 600, 650, 700, 800, 1000
- Instyle/Prostyle Tunnel
- Instyle 600V Next, 700V Next, 800V Next

Instyle
Front



Replace your old (open) fireplace for an eco-friendly one

The Instyle/Prostyle series consists of a number of models with different sizes, all using the same modern Dik Geurts techniques. With an Instyle you are assured of optimal enjoyment of a quality fire.

- Environmentally conscious enjoyment of fire
- Multi-purpose insert and built-in fires
- Different styles of detachable frames
- Choice of different frame types
- Optional kit for self-closing door for Instyle 500EA-700EA

Instyle 500

Efficiency	82,0%	A+
W x D x H	520 x 350 x 480 mm	

3-7 kW EA



Instyle 550

Efficiency	81,0%	A+
W x D x H	527 x 350 x 560 mm	

3-7 kW EA



Instyle 600

Efficiency	79,6%	A
W x D x H	600 x 360 x 480 mm	

3-7 kW EA



Instyle 650

Efficiency	80,5%	A
W x D x H	650 x 380 x 495 mm	

3-9 kW EA



Instyle 700



Build in frame 8 mm

Instyle 700

Efficiency 81,6% A+
W x D x H 700 x 400 x 600 mm

6-12 kW EA



Instyle 800

Efficiency 76,6% A
W x D x H 800 x 400 x 580 mm

8-12 kW EA



Instyle 1000


Efficiency 77,7% A
W x D x H 1000 x 400 x 580 mm

9-13 kW EA



Prostyle
Front

Beautiful fire view thanks to black screen-printed glass

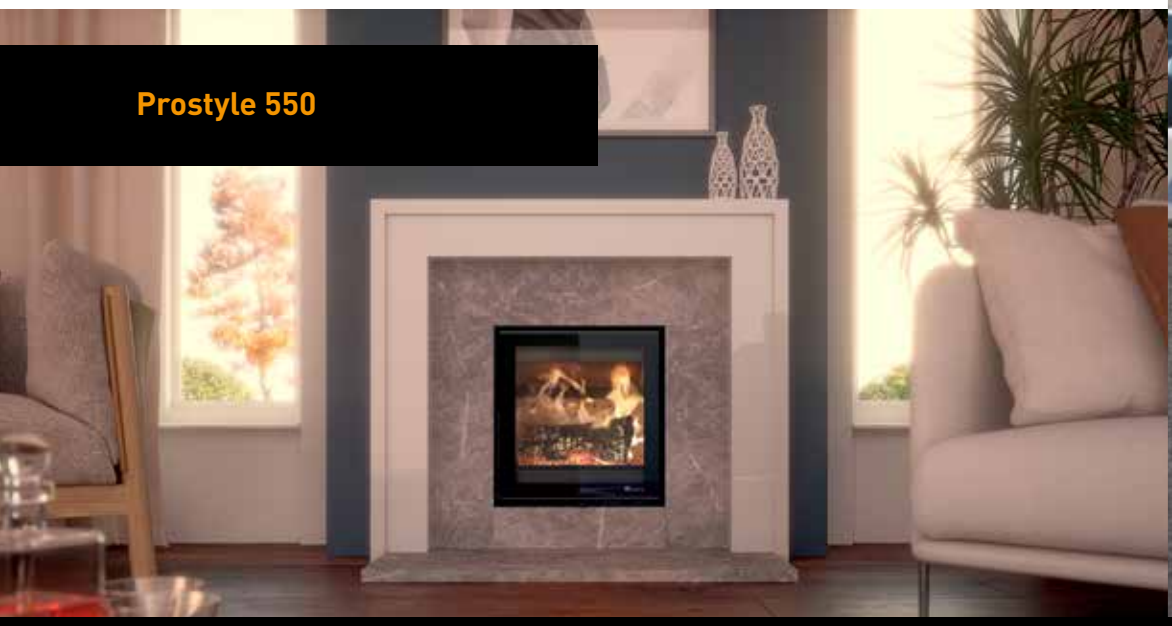

Prostyle 550



Prostyle 500

Efficiency 82,0% A+
W x D x H 520 x 344 x 480 mm

3-7 kW EA



Prostyle 550

Efficiency 81,0% A+
W x D x H 527 x 344 x 560 mm

3-7 kW EA



Prostyle 600

Efficiency 79,6% A
W x D x H 600 x 358 x 480 mm

3-7 kW EA



Prostyle 650

Efficiency 80,5% A
W x D x H 650 x 374 x 495 mm

3-9 kW EA





Prostyle 1000

Prostyle 700

Efficiency 81,6% A+
W x D x H 700 x 394 x 600 mm

6-12 kW EA



Prostyle 800

Efficiency 76,6% A
W x D x H 800 x 394 x 580 mm

8-12 kW EA



Prostyle 1000

Efficiency 77,7% A
W x D x H 1000 x 394 x 580 mm

9-13 kW EA



Instyle
Front, ventilator

Fire insert with ventilating fan

These ventilated inserts are equipped with a ventilating fan, which heats a room faster. When switched on, a pleasant, warm airflow can be felt from the front of the fire or through the convection openings.



Why Instyle V Next?
- Rapid heat distribution
- Impressive fire view
- Simple operation
- An efficient replacement for old fireplaces
- Optional kit for self-closing door for Instyle 600V-700V Next

How does it work?
A special adapter gives you full control of the fan. There are four speeds for gradual to rapid heating. And, thanks to a smart control sensor, the fan automatically adjusts to the desired temperature.

More information?
Watch the Instyle V Next video.



Instyle 600V Next
Efficiency 79,6% A
BxDxH 580x410x495mm
3-7 kW EA



Instyle 700V Next
Efficiency 81,6% A+
WxDxH 680x450x615mm
6-12 kW EA



Instyle 800V Next
Efficiency 76,6% A
WxDxH 780x450x595mm
8-12 kW EA





Instyle 700V Next

Instyle & Prostyle

Tunnel 700

Splendid fire from two sides

The tunnel fireplaces Instyle and Prostyle Tunnel 700 have a hinged glass door on two sides.
Thanks to its high output, this fire is ideal as a room divider in larger rooms.

- Beautiful see-through tunnel
- High output up to 12 kW
- In RS (Room Sealed) version almost completely airtight
- Optional kit for self-closing door for Instyle Tunnel 700EA

GREENBLOCKS

Instyle Tunnel 700

Efficiency	79,8% A
W x D x H	700 x 550 x 600 mm

9-12 kW · IR · EA · DG Filter · DG Cat · DG Smart Assist · DG Room Sealed



Prostyle Tunnel 700

Efficiency	79,8% A
W x D x H	700 x 554 x 600 mm

9-12 kW · IR · EA · DG Filter · DG Cat · DG Smart Assist · DG Room Sealed



Scan the QR code for a preview



Instyle Tunnel 700

Scan the QR code for a preview

Instyle
Corner Slim



Unique panoramic fire view

These two-sided wood stoves are characterised by their panoramic fire view. The glass panes are placed against one another in the corner. This continuous glass window, without a metal corner post between the two panes, provides a full view of the fire.

- Optimal view of the fire
- High efficiency
- Perfect for an existing chimney or new construction
- Optional build in frame

Instyle Corner Slim 660/570

Efficiency	80,0% A
W x D x H	660 x 350 x 570 mm

5-10 kW | IR | EA | DG Room Sealed



Scan the QR code for a preview

Scan the QR code for a preview

Instyle Corner Slim 660/495

Efficiency 75,2% A


W x D x H 660 x 350 x 495 mm

4-10 kW | EA | DG Room Sealed

Optional build in frame 6S

- For a seamless finish to the fireplace assembly
- Very suitable for installation in a new build situation
- Width 6 cm (working width 5 cm)
- Solid frame, thickness 6 mm




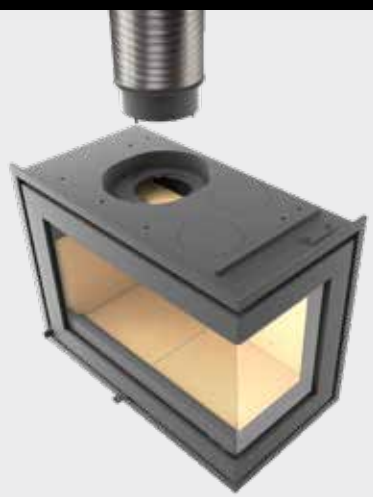

SlideConnect®

(only at Instyle Corner Slim 660/495)

- Easy connection to an existing or new flue
- Rotatable ring with 4 cm extra working space
- A major advantage, especially in existing situations

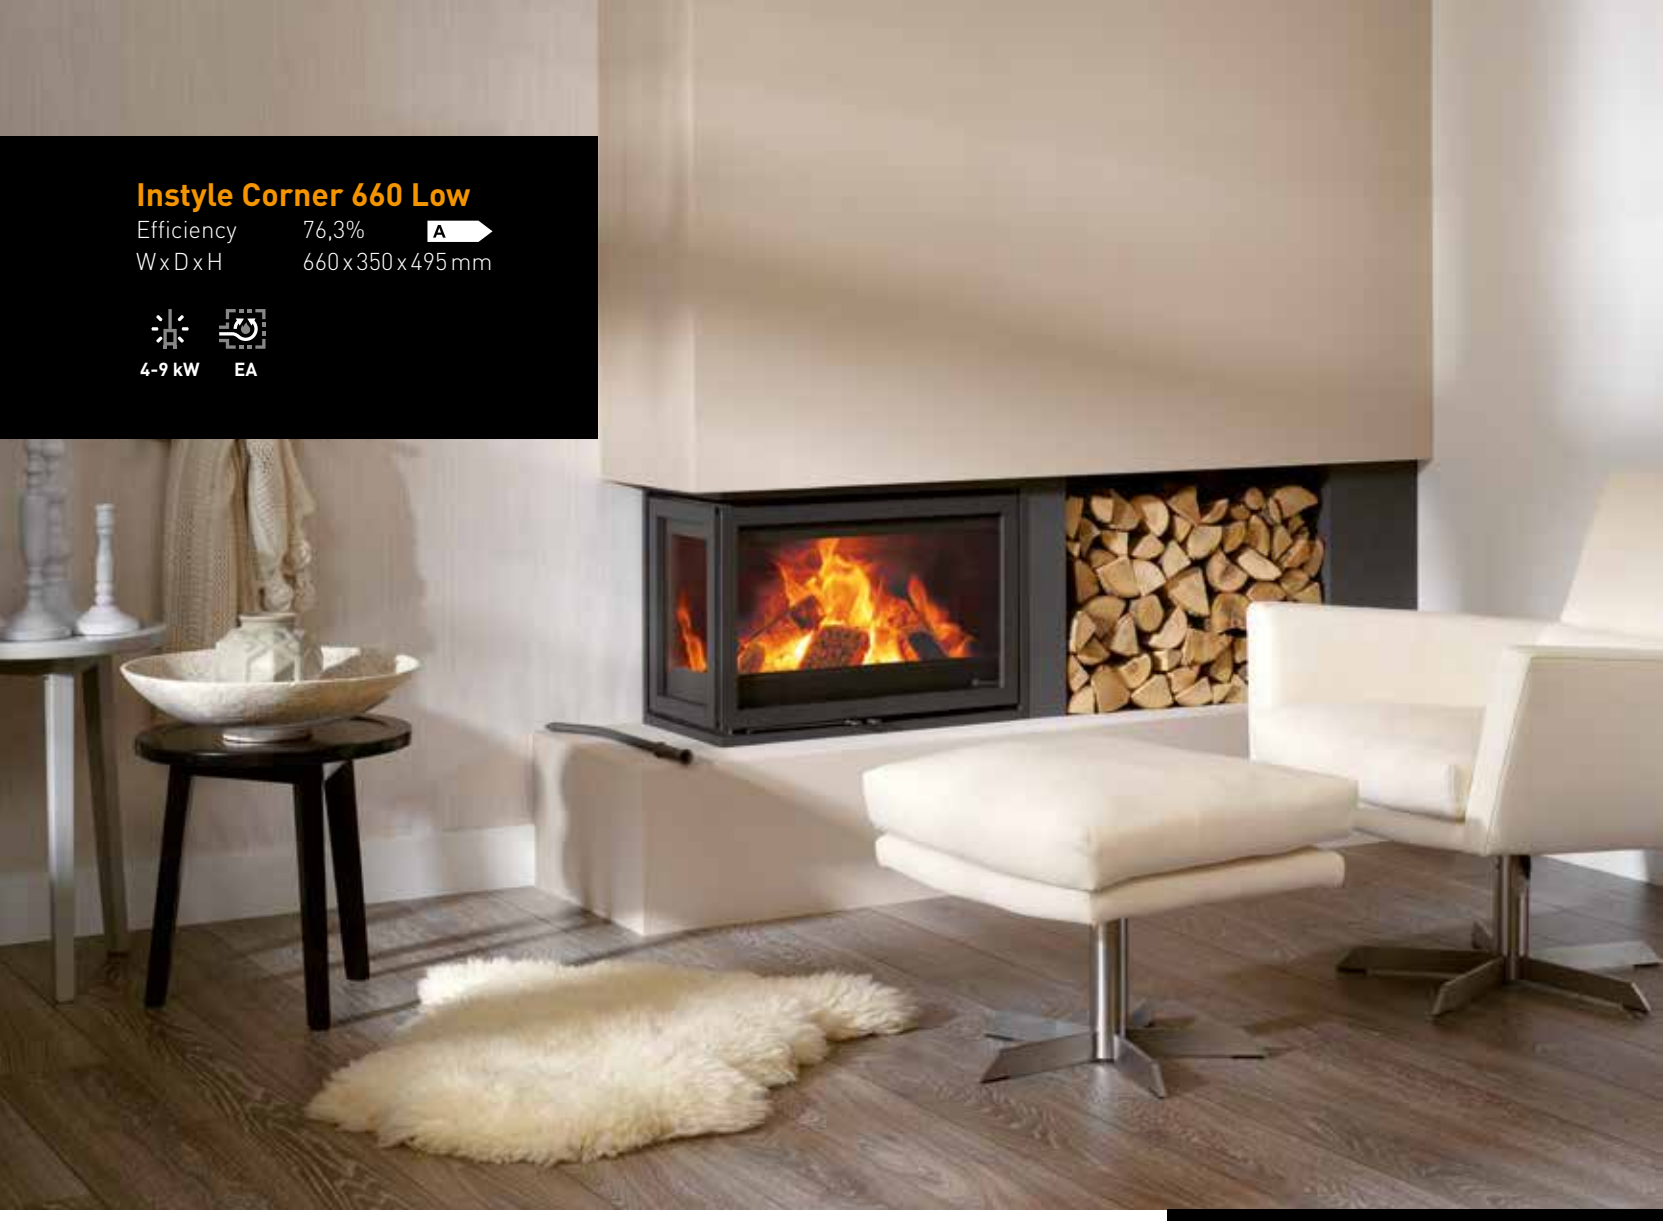

Instyle Corner 660 Low

Efficiency	76,3% A
W x D x H	660 x 350 x 495 mm

4-9 kW EA

Instyle Corner 660 High

Efficiency	76,3% A
W x D x H	660 x 350 x 520 mm

4-9 kW EA

Instyle
Corner

Generous insert fireplace with glass on two sides

These two-sided fireplaces fit perfectly in the corner of a living space. The frames are only 20 mm wide, contributing to a sleek, minimalist design. Thanks to the large glass surface, you can enjoy a wide and unobstructed view of the fire.

- Side window available on the left or right
- Easy-to-use air slide for regulating the airflow
- Choose between the low or high model

Instyle
Triple

Three sided glass and three sided fire

To ensure the highest possible efficiency, this insert is fitted with side windows with heat-reflecting infrared glass. This fire is only 49.5 cm high and therefore ideal for installation in most existing fireplaces.

- Subtle corner bars for better fire vision
- Suitable for installation in existing situation
- In RS (Room Sealed) version almost completely airtight

Instyle Triple 660 Low

Efficiency	76,3% A
W x D x H	662 x 380 x 495 mm

4-9 kW | IR | EA | DG Room Sealed



Instyle

Triple U 700

Fire from every angle

With its three-sided view of the flames, the Instyle Triple U 700 creates a stunning focal point and serves as an elegant room divider. An excellent choice for modern interiors and open-plan living spaces. Behind its refined design lies outstanding performance, ensuring maximum heat is extracted from every log.

- Hinged doors on 2 (long) sides
- Heat-reflective infrared glass
- Optional:
  - 8S build in frame
  - Kit for self-closing door
  - Raised ash threshold

GREENBLOCKS



Easy cleaning thanks to the hinged door





Instyle Triple U 700

Efficiency	78,8% A
W x D x H	460x714x792 mm

6-12 kW | IR | EA | DG Cat | DG Smart Assist | DG Room Sealed

Scan the QR code for a preview

Easy installation

The various connection options ensure that the stove is quick and easy to install, regardless of the installation situation. There are three options for flue gas extraction.

1. Connection without drain material to an existing chimney flue (**sealing with ceramic wool**)
2. Connection with flexible or fixed pipe (**Liner Kit Pro**), Ø 150 or 180 mm
3. Connection with rejuvenated pipe (**connection piece**), Ø 150 or 180 mm

External air kit

Kit for supply of fresh air from outside, ideal for fully insulated houses

- Optional at 500 - 1000, 600V, Tunnel (only base)
- For rear and base connection
- Dimensions: Ø 80 mm



Linerkit Pro

Connection piece for flexible or rigid pipe.

- Optional with: 500 - 1000, 600V, Corner, Triple, Tunnel
- Connectable from the inside of the fire
- Reducer with 3 screw holes
- Dimensions: Ø 150 mm, Ø 180 mm



Connection piece

Connection piece for rejuvenated pipe.

- Optional with: 500 - 1000, 600V, Corner, Triple, Tunnel
- Reducer with 3 screw holes
- Dimensions: Ø 150 mm, Ø 180 mm



Convection kit

Connecting rings (2 pieces) for mounting on the convection holes.


- Optional with: 500 - 1000, 600V, Corner Slim, Tunnel
- For more heating power
- Dimensions: Ø 125 mm




INSERT-/BUILT-IN FIRES CONNECTION OPTIONS

Instyle / Prostyle


External air kit




Linerkit Pro



Connection piece



Convection kit




Easy air control

- At the front of the fire
- Both Instyle and Prostyle finishes

Door lock

- Stable and flexible door closure
- The cord ensures a good seal
- The door is adjustable and exchangeable
- Optional kit for self-closing door for Instyle 500EA-700EA, 600V-700V Next, Tunnel 700EA



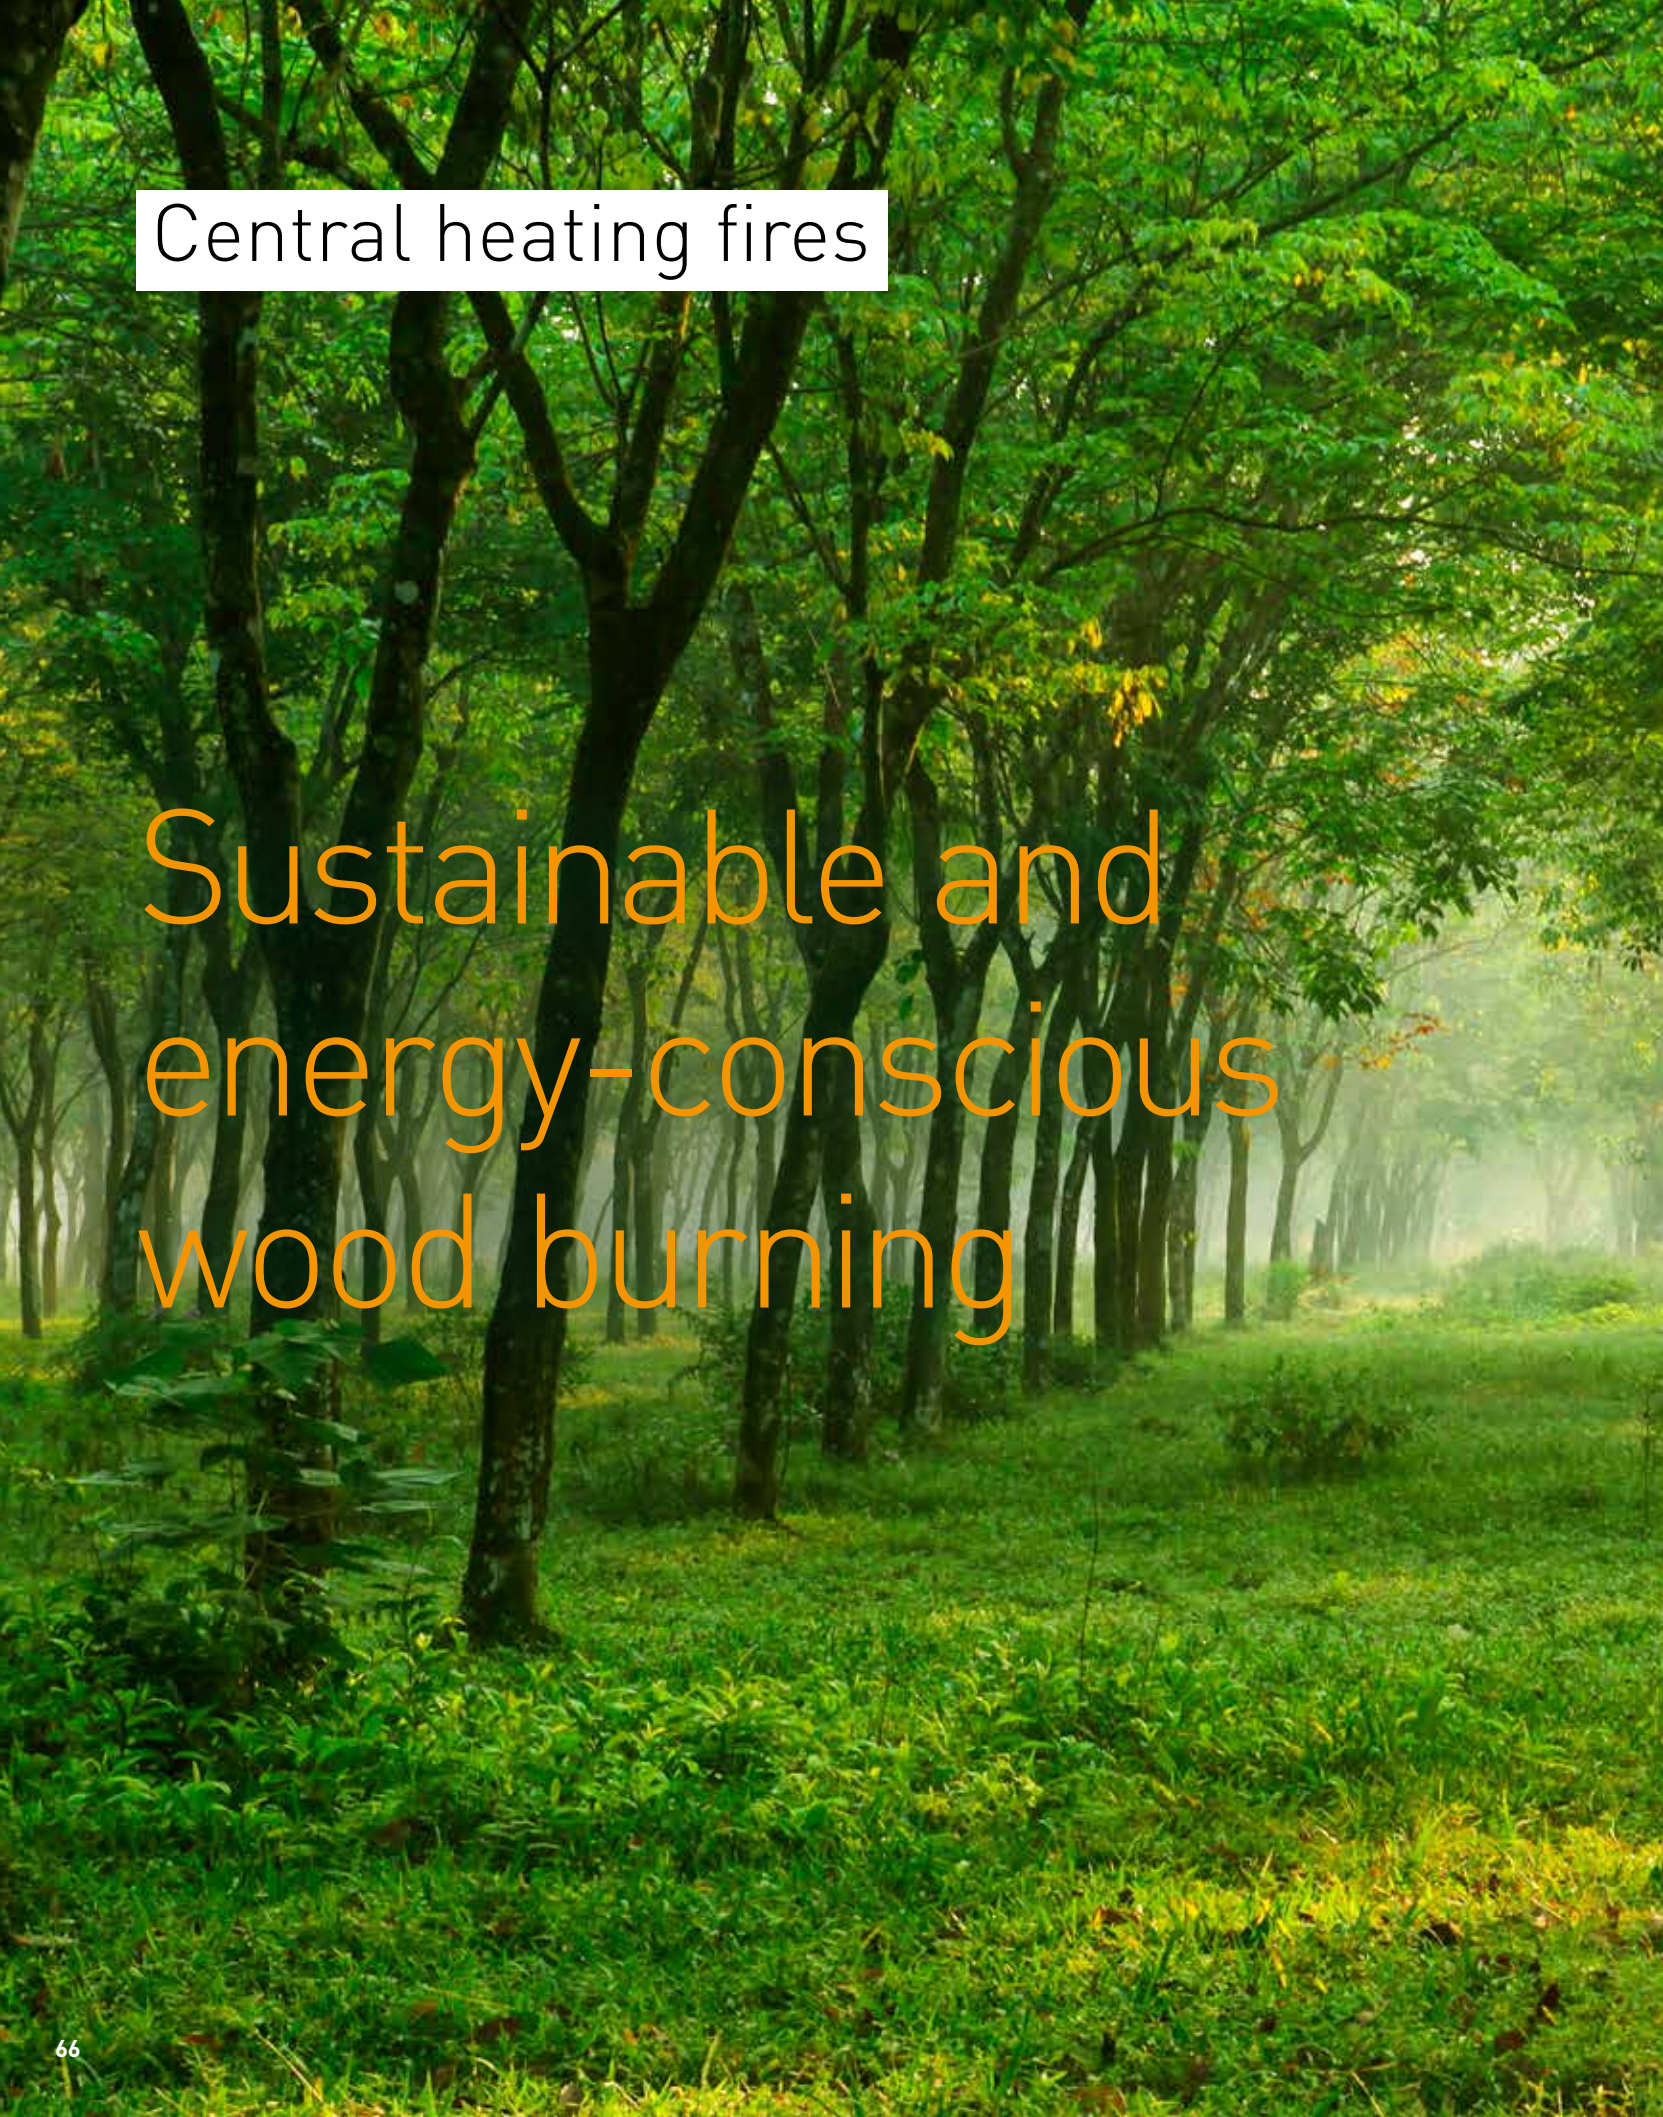

Sustainable and energy-conscious wood burning

Green Design stands for sustainable, environmentally friendly and energy-conscious heating of fires and stoves connected to a central heating system.

Dik Geurts also supplies fires that you can connect to a central heating system, an environmentally friendly alternative way to heat your home. With these fires the hot flue gases are used to heat the water for your central heating system. Doing this means you get more efficiency from your fire or stove, resulting in
a lower energy bill – and it's also sustainable.

- Environmentally friendly heating
- Durable/lower energy usage
- Suitable for any type of home
- Can be combined with solar panels and heat pumps
- Lower energy bill
- Maintenance friendly



More info

If you want to know more about Green Design or the operation of central heating fireplaces, visit **www.greendesign.eu**.

Scan the QR code for an **informative animation film**.



Ivar 10 H2O, Store

Efficiency 81,5% A+

W x D x H 650 x 468 x 1000 mm


8-12 kW | IR | EA | DG Room Sealed

Line drawings

DESIGN FIRES


Odin Front

Odin Front, Fixed

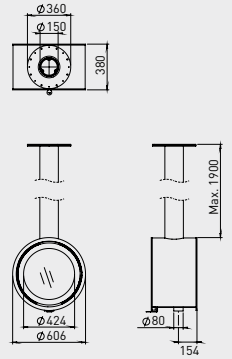


P. 14

Odin Front, Base

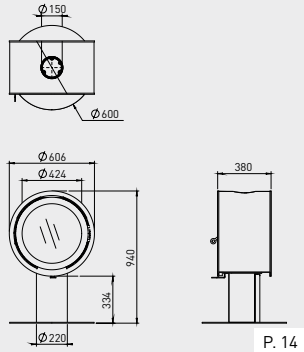


P. 14

Odin Front, Wall



P. 14


Odin Front, Plateau



P. 15


Odin Tunnel

Odin Tunnel, Fixed




P. 16

Odin Tunnel, Base



P. 17


Odin Tunnel, Plateau



P. 17


Oval Front

Oval Front, Fixed

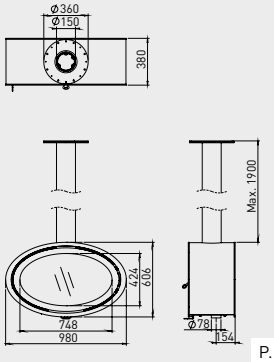


P. 18

Oval Front, Base




P. 18

Oval Front, Wall




P. 18

Oval Front, Plateau



P. 18


Oval Front, Legs



P. 19


Oval Tunnel

Oval Tunnel, Fixed




P. 20

Oval Tunnel, Base




P. 21

Oval Tunnel, Legs



P. 21


Oval Tunnel, Plateau



P. 21


Bora Corner

Bora Corner, Cubes




P. 23

Bora Corner, Fixed

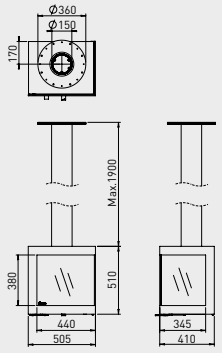


P. 22

Bora Corner, Floating Plateau




P. 22

Bora Corner, Straight Plateau



P. 22

Bora Corner, Wall




P. 23

WOOD AND MULTI-FUEL STOVES


Vidar Triple

Vidar Triple Medium, Store




P. 27

Vidar Triple Medium, Floating Plateau




P. 26

Vidar Triple Medium, Straight Plateau



P. 26

Vidar Triple Medium, Wall




P. 26

WOOD AND MULTI-FUEL STOVES


Vidar Triple

Vidar Triple Large, Store

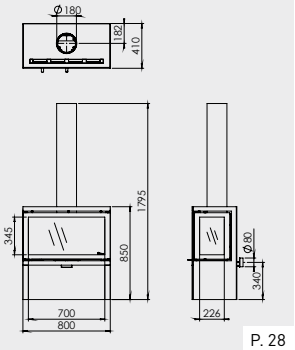


P. 28

Vidar Triple Large, Straight Plateau




P. 28

Vidar Triple Large, Wall




P. 28

Vidar Triple Small, Store




P. 29

Vidar Triple Small, Floating Plateau




P. 29

Vidar Triple Small, Straight Plateau



P. 29


Vidar Triple Small, Wall



P. 29

Folke


Folke



P. 30

Kalle Next


Kalle Next



P. 31


Modivar 5

Modivar 5, Floating Plateau




P. 32

Modivar 5, Straight Plateau




P. 32

Modivar 5, Store Front



P. 32


Modivar 5, Store Corner



P. 32


Orbe

Orbe



P. 34


Orbe, High

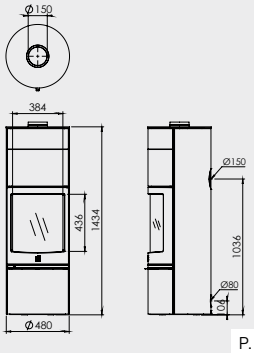

P. 35

Soren 5


Soren 5



P. 36

Aste 5


Aste 5



P. 36

Lars 1000


Lars 1000



P. 37


Ivar 5

Ivar 5, Low




P. 38

Ivar 5, High



P. 40


Ivar 5, Store



P. 41


Ivar 8

Ivar 8, Low



P. 42


Ivar 8, Store



P. 43


Jannik

Jannik Medium, Low




P. 44

Jannik Medium, High



P. 44

Jannik Large




P. 45

INSERT-/BUILT-IN FIRES INSTYLE/PROSTYLE


Instyle Front

Instyle 500
+ Classic Line frame 4S




P. 50

Instyle 550
+ Classic Line frame 4S




P. 50

Instyle 600
+ Classic Line frame 4S



P. 50


Instyle 650
+ Classic Line frame 4S



P. 50


Instyle Front

Instyle 700
+ Classic Line frame 4S




P. 50

Instyle 800
+ Classic Line frame 4S



P. 50


Instyle 1000
+ Classic Line frame 4S



P. 50


Prostyle Front

Prostyle 500
+ Modern Line frame




P. 52

Prostyle 550
+ Modern Line frame




P. 52

Prostyle 600
+ Modern Line frame




P. 52

Prostyle 650
+ Modern Line frame




P. 52

Prostyle 700
+ Modern Line frame




P. 52

Prostyle 800
+ Modern Line frame



P. 52


Prostyle 1000
+ Modern Line frame



P. 52


Instyle (ventilator)

Instyle 600V Next
+ Classic Line frame 4S




P. 54

Instyle 700V Next
+ Classic Line frame 4S



P. 54


Instyle 800V Next
+ Classic Line frame 4S



P. 54

Instyle Tunnel


Instyle Tunnel 700
+ Classic Line frame 4S



P. 56

Prostyle Tunnel


Prostyle Tunnel 700
+ Slim Line frame



P. 56


Instyle Corner Slim

Instyle Corner Slim 660/495



P. 58


Instyle Corner Slim 660/570



P. 58


Instyle Corner

Instyle Corner 660 Low



P. 60


Instyle Corner 660 High



P. 60


Instyle Triple

Instyle Triple 660 Low



P. 61

Instyle Triple U 700




P. 62

CENTRAL HEATING FIRES

Ivar 10 H2O

Ivar 10 H2O, Store



P. 67

Technical specifications

GREENBLOCKS

Page	Wood burning fireplaces and stoves	Net output (kW)	Efficiency (%)	Energy efficiency class	Flue upper (ø, mm)	Flue rear (ø, mm)	External air connection (EA)	Maximum log length (cm)	Weight (kg)	Interior vermiculite natural	Interior vermiculite dark anthracite	Infrared glass (IR)	Type: wall	Type: freestanding	Type: free hanging	DG Filter	DG Therm	DG Cat	DG Smart Assist	DG Room Sealed (RS)
Design fires																				
Front fires																				
14	Odin Front, Fixed [3]	4,0 - 8,0	75,2	A	150	-	optional	33	85	-	+	-	-	-	+	-	-	-	-	-
14	Odin Front, Base [3]	4,0 - 8,0	75,2	A	150	-	optional	33	100	-	+	-	-	+	-	-	-	-	-	-
14	Odin Front, Wall [3]	4,0 - 8,0	75,2	A	150	-	optional	33	85	-	+	-	+	-	-	-	-	-	-	-
15	Odin Front, Plateau [3]	4,0 - 8,0	75,2	A	150	-	optional	33	125	-	+	-	-	+	-	-	-	-	-	-
18	Oval Front, Fixed [3]	6,0 - 10,0	75,9	A	150	-	optional	50	120	-	+	-	-	-	+	-	-	-	-	+
18	Oval Front, Base [3]	6,0 - 10,0	75,9	A	150	-	optional	50	135	-	+	-	-	+	-	-	-	-	-	+
18	Oval Front, Plateau [3]	6,0 - 10,0	75,9	A	150	-	optional	50	160	-	+	-	-	+	-	-	-	-	-	+
18	Oval Front, Wall [3]	6,0 - 10,0	75,9	A	150	-	optional	50	120	-	+	-	+	-	-	-	-	-	-	+
19	Oval Front, Legs [3]	6,0 - 10,0	75,9	A	150	-	optional	50	130	-	+	-	-	+	-	-	-	-	-	+
Tunnel fires																				
16	Odin Tunnel, Fixed	6,0 - 10,0	75,0	A	150	-	optional	33	85	-	+	-	-	-	+	-	-	-	-	-
17	Odin Tunnel, Base	6,0 - 10,0	75,0	A	150	-	optional	33	130	-	+	-	-	+	-	-	-	-	-	-
17	Odin Tunnel, Plateau	6,0 - 10,0	75,0	A	150	-	optional	33	125	-	+	-	-	+	-	-	-	-	-	-
20	Oval Tunnel, Fixed [3]	9,0 - 12,0	81,5	A+	150	-	optional	50	120	-	+	+	-	-	+	-	-	-	-	+
21	Oval Tunnel, Base [3]	9,0 - 12,0	81,5	A+	150	-	optional	50	135	-	+	+	-	+	-	-	-	-	-	+
21	Oval Tunnel, Legs [3]	9,0 - 12,0	81,5	A+	150	-	optional	50	130	-	+	+	-	+	-	-	-	-	-	+
21	Oval Tunnel, Plateau [3]	9,0 - 12,0	81,5	A+	150	-	optional	50	160	-	+	+	-	+	-	-	-	-	-	+
2-sided fires																				
22	Bora Corner, Cubes [3]	4,0 - 9,0	78,1	A	150	-	optional	36	145	-	+	+	-	+	-	-	-	-	-	+
23	Bora Corner, Fixed [3]	4,0 - 9,0	78,1	A	150	-	optional	36	95	-	+	+	-	-	+	-	-	-	-	+
23	Bora Corner, Floating Plateau [3]	4,0 - 9,0	78,1	A	150	-	optional	36	145	-	+	+	-	+	-	-	-	-	-	+
24	Bora Corner, Straight Plateau [3]	4,0 - 9,0	78,1	A	150	-	optional	36	140	-	+	+	-	+	-	-	-	-	-	+
25	Bora Corner, Wall [3]	4,0 - 9,0	78,1	A	150	-	optional	36	95	-	+	+	+	-	-	-	-	-	-	+
Wood and multi-fuel stoves																				
3-sided fires																				
27	Vidar Triple Medium, Store [3]	4,0 - 9,0	76,3	A	150	-	optional	50	130	+	-	+	-	+	-	-	-	-	+	+
26	Vidar Triple Medium, Floating Plateau [3]	4,0 - 9,0	76,3	A	150	-	optional	50	170	+	-	+	-	+	-	-	-	-	+	+
26	Vidar Triple Medium, Straight Plateau [3]	4,0 - 9,0	76,3	A	150	-	optional	50	165	+	-	+	-	+	-	-	-	-	+	+
26	Vidar Triple Medium, Wall [3]	4,0 - 9,0	76,3	A	150	-	optional	50	123	+	-	+	+	-	-	-	-	-	+	+
28	Vidar Triple Large, Store [3]	6,0 - 10,0	79,0	A	180	-	optional	50	137	+	-	+	-	+	-	-	-	-	+	+
28	Vidar Triple Large, Straight Plateau [3]	6,0 - 10,0	79,0	A	180	-	optional	50	173	+	-	+	-	+	-	-	-	-	+	+
28	Vidar Triple Large, Wall [3]	6,0 - 10,0	79,0	A	180	-	optional	50	131	+	-	+	+	-	-	-	-	-	+	+
29	Vidar Triple Small, Store [3]	4,0 - 7,0	79,0	A	125/130	-	optional	35	102	+	-	+	-	+	-	-	-	-	+	+
29	Vidar Triple Small, Floating Plateau [3]	4,0 - 7,0	79,0	A	125/130	-	optional	35	147	+	-	+	-	+	-	-	-	-	+	+
29	Vidar Triple Small, Straight Plateau [3]	4,0 - 7,0	79,0	A	125/130	-	optional	35	142	+	-	+	-	+	-	-	-	-	+	+
29	Vidar Triple Small, Wall [3]	4,0 - 7,0	79,0	A	125/130	-	optional	35	100	+	-	+	+	-	-	-	-	-	+	+
30	Folke [3]	4,0 - 8,0	77,3	A	150	150	optional	35	125	+	-	+	-	+	-	-	-	-	+	+
31	Kalle Next [3]	4,0 - 8,0	77,3	A	150	150	optional	35	125	+	-	+	-	+	-	+	-	-	+	+
Front fires																				
32	Modivar 5, Floating Plateau [3]	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	140	+	-	-	-	+	-	-	-	-	-	+
32	Modivar 5, Straight Plateau [3]	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	135	+	-	-	-	+	-	-	-	-	-	+
32	Modivar 5, Store Front [3]	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	120	+	-	-	-	+	-	-	-	-	-	+
32	Modivar 5, Store Corner [3]	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	120	+	-	-	-	+	-	-	-	-	-	+
34	Orbe [3]	5,0 - 9,0	81,6	A+	150	150	optional	30	125	+	-	-	-	+	-	-	-	+	+	+
35	Orbe, High [3]	5,0 - 9,0	81,6	A+	150	150	optional	30	145	+	-	-	-	+	-	+	+	+	+	+
36	Soren 5 [1] [3]	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	85	+	-	-	-	+	-	-	-	-	-	+
36	Aste 5 [1] [3]	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	85	+	-	-	-	+	-	-	-	-	-	+



Page	Wood burning fireplaces and stoves	Net output (kW)	Efficiency (%)	Energy efficiency class	Flue upper (ø, mm)	Flue rear (ø, mm)	External air connection (EA)	Maximum log length (cm)	Weight (kg)	Interior vermiculite natural	Interior vermiculite dark anthracite	Infrared glass (IR)	Type: wall	Type: freestanding	Type: free hanging	DG Filter	DG Therm	DG Cat	DG Smart Assist	DG Room Sealed (RS)
Wood and multi-fuel stoves																				
	Front fires																			
37	Lars 1000	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	100	-	+	-	-	-	+	-	-	-	-	+
39	Ivar 5, Low [1] [3]	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	85	-	+	-	-	+	-	-	-	-	-	+
40	Ivar 5, High [1] [3]	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	90	-	+	-	-	-	-	-	-	-	-	+
41	Ivar 5, Store [1] [3]	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	105	-	+	-	-	+	-	-	-	-	-	+
42	Ivar 8, Low [1] [3]	5,0 - 10,0	76,6	A	150	150	optional	46	100	-	+	-	-	-	+	-	-	-	-	+
43	Ivar 8, Store [1] [3]	5,0 - 10,0	76,6	A	150	150	optional	46	120	-	+	-	-	+	-	-	-	-	-	+
44	Jannik Medium, Low [3]	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	90	-	+	-	-	+	-	-	-	-	-	-
44	Jannik Medium, High [3]	4,0 - 7,0	82,0	A+	125/130	125/130	optional	35	90	-	+	-	-	-	-	-	-	-	-	-
45	Jannik Large	4,0 - 8,0	81,5	A+	130&150	130&150	optional	40	105	-	+	-	-	+	-	-	-	-	-	-
Inserts and built-in wood fires																				
	Front fires (built-in/insert)																			
50	Instyle 500 [3]	3,0 - 7,0	82,0	A+	150	-	optional	35	80	+	-	-	-	-	-	-	-	-	-	-
50	Instyle 550 [3]	3,0 - 7,0	81,0	A+	150	-	optional	36	94	+	-	-	-	-	-	-	-	-	-	-
50	Instyle 600 [3]	3,0 - 7,0	79,6	A	150	-	optional	42	120	+	-	-	-	-	-	-	-	-	-	-
50	Instyle 650 [3]	3,0 - 9,0	80,5	A	150	-	optional	40	108	+	-	-	-	-	-	-	-	-	-	-
51	Instyle 700 [3]	6,0 - 12,0	81,6	A+	180	-	optional	45	116	+	-	-	-	-	-	-	-	-	-	-
51	Instyle 800	8,0 - 12,0	76,6	A	180	-	optional	55	130	+	-	-	-	-	-	-	-	-	-	-
51	Instyle 1000	9,0 - 13,0	77,7	A	180	-	optional	75	145	+	-	-	-	-	-	-	-	-	-	-
52	Prostyle 500 [3]	3,0 - 7,0	82,0	A+	150	-	optional	35	80	+	-	-	-	-	-	-	-	-	-	-
52	Prostyle 550 [3]	3,0 - 7,0	81,0	A+	150	-	optional	36	94	+	-	-	-	-	-	-	-	-	-	-
52	Prostyle 600 [3]	3,0 - 7,0	79,6	A	150	-	optional	42	120	+	-	-	-	-	-	-	-	-	-	-
52	Prostyle 650 [3]	3,0 - 9,0	80,5	A	150	-	optional	40	108	+	-	-	-	-	-	-	-	-	-	-
53	Prostyle 700 [3]	6,0 - 12,0	81,6	A+	180	-	optional	45	116	+	-	-	-	-	-	-	-	-	-	-
53	Prostyle 800	8,0 - 12,0	76,6	A	180	-	optional	55	130	+	-	-	-	-	-	-	-	-	-	-
53	Prostyle 1000	9,0 - 13,0	77,7	A	180	-	optional	75	145	+	-	-	-	-	-	-	-	-	-	-
	Front fires, with ventilating fan (insert)																			
54	Instyle 600V Next	3,0 - 7,0	79,6	A	150	-	optional	42	98	+	-	-	-	-	-	-	-	-	-	-
54	Instyle 700V Next	6,0 - 12,0	81,6	A+	180	-	optional	45	120	+	-	-	-	-	-	-	-	-	-	-
54	Instyle 800V Next	8,0 - 12,0	76,6	A	180	-	optional	55	130	+	-	-	-	-	-	-	-	-	-	-
	Tunnel fires (built-in)																			
56	Instyle Tunnel 700 [3]	9,0 - 12,0	79,8	A	180	-	optional	50	140	+	-	+	-	-	-	+	-	+	+	+
56	Prostyle Tunnel 700 [3]	9,0 - 12,0	79,8	A	180	-	optional	50	140	+	-	+	-	-	-	+	-	+	+	+
	2-sided fires (built-in/insert)																			
58	Instyle Corner Slim 660/495 [3]	4,0 - 10,0	75,2	A	150 [2]	-	optional	50	110	+	-	-	-	-	-	-	-	-	-	+
58	Instyle Corner Slim 660/570 [3]	5,0 - 10,0	80,0	A	180	-	optional	50	120	+	-	+	-	-	-	-	-	-	-	+
60	Instyle Corner 660 Low	4,0 - 9,0	76,3	A	150	-	including	50	105	+	-	-	-	-	-	-	-	-	-	-
60	Instyle Corner 660 High	4,0 - 9,0	76,3	A	150	-	including	50	105	+	-	-	-	-	-	-	-	-	-	-
	3-sided fires (built-in/insert)																			
61	Instyle Triple 660 Low	4,0 - 9,0	76,3	A	150	-	optional	50	100	+	-	+	-	-	-	-	-	-	-	+
	3-sides fires (built-in)																			
62	Instyle Triple U 700	6,0 - 12,0	78,8	A	150	-	optional	50	140	+	-	+	-	-	-	-	-	+	+	+
Central heating fires																				
67	Ivar 10 H2O, Store	8,0 - 12,0	81,5	A+	150	-	optional	50	225	+	-	+	-	+	-	-	-	-	-	+

[1] Multi-fuel kit available for burning multi-fuel/coals.

[2] SlideConnect® = variable connection to the flue (can be shifted to 4 cm).

[3] Defra approved = approved to use in smoke controlled areas.





Dealer

Dik Geurts
Creation of flames

DRU Verwarming B.V.
P.O. Box 1021, 6920 BA Duiven
Ratio 8, 6921 RW Duiven
The Netherlands

T. +31 (0)26 - 319 5 319
www.dikgeurts.com

Drugasar Ltd.
Deans Road, Swinton
Manchester, M27 0JH
United Kingdom

T. +44 (0)161 - 793 8700
www.dikgeurts.co.uk

DRU Belgium
Kontichsesteenweg 69/1
2630 Aartselaar
Belgium

T. +32 (0)3 - 450 7000
www.dikgeurts.be

since 1754

Dik Geurts is a trademark of DRU Verwarming B.V. Subject to changes. The colours in this brochure may vary from the actual products. Nothing in this publication may be used without prior written consent from DRU Verwarming B.V.

BY APPOINTMENT OF
THE COURT OF THE NETHERLANDS

Art.993476 | 2026-09

SOCIAL MEDIA: For more inspiration and information, visit one of our social media channels or scan the QR code.